

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Binderholz Brettsperrholz BBS

according to the product specification listed in the current addendum to this certificate placed on the market by

Company

BINDERHOLZ BAUSYSTEME GMBH

Zillertalstraße 39

AT-6263 Fügen

and produced in the manufacturing plant

Binderholz Unternberg GmbH, Brettsperrholzwerk

AT-5585 Unternberg, Stranach 26

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in

ETA-06/0009, issued on 27.09.2022

and

EAD 130005-00-0304

under system 1 for the performance set out in the ETA are applied and that the factory production control conducted by the manufacturer is assessed to ensure the constancy of performance of the construction product.

CERTIFICATE OF CONSTANCY OF PERFORMANCE

Certificate number: 1359-CPR-0894

Date of first issue: 02.05.2018


Date of issuance: 18.09.2025

This certificate will remain valid as long as neither the ETA, the EAD, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforschung.at.



Dr. Andreas Neumüller
Authorised signatory

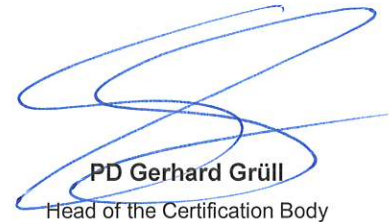

PD Gerhard Grüll
Head of the Certification Body

Addendum to certificate 1359-CPR-0894

Date of issue: 18.09.2025

Scope of certification for the following products:

Solid wood slabs to be used as structural elements in building

Binderholz Brettsperrholz BBS

Structure:	at least 3-layer, 90 ° locked glued System format: standard construction 3 to 15 layers Large format: standard construction 3 to 15 layers
Strength classes of the laminations:	C 24
Thickness:	System format: 51 - 350 mm Large format: 51 - 315 mm
Width x length:	System format: max. 1,26 x 24,0 m (with universal finger joint) Large format: 3,5 x 22,0 m
Classes of utilisation:	1, 2
Wood species:	PCAB – spruce / ABAL – fir / PNSY - pine System format: PCAB – spruce / LADC – larch (top layer); PCAB – spruce / PSMN – douglas fir (top layer)
Adhesives:	
- finger joints:	Type I: PUR according to EN 15425
- surface bonding:	Type I: PUR according to EN 15425
- universal finger jointing:	Type I: PUR according to EN 15425